




XL Timing Belts



Pitch .200" (5.08 mm)

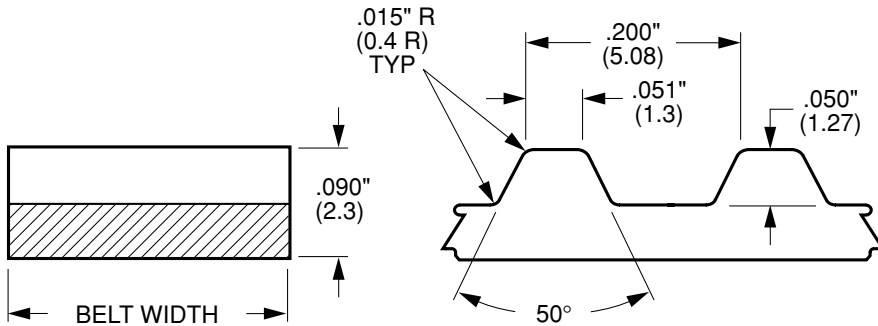

MATERIAL:

Nylon Covered, Fiberglass Reinforced, Neoprene

LOADING CAPACITY:

343 lbf/in. (60 N/mm) Belt Width

BREAKING STRENGTH:

≥457 lbf/in. (80 N/mm) Belt Width

TEMPERATURE RANGE:

-40°F to 248°F (-40°C to 120°C)

QB-XL -

PITCH LENGTH CODE

WIDTH CODE	Belt* Width
025	1/4" (6.4)
031	5/16" (7.9)
037	3/8" (9.5)

PITCH LENGTH CODE	Pitch Length		No. of Teeth
	Inch	mm	
0044	4.4	111.76	22
0056	5.6	142.24	28
0060	6.0	152.40	30
0070	7.0	177.80	35
0076	7.6	193.04	38
0080	8.0	203.20	40
0082	8.2	208.28	41
0084	8.4	213.36	42
0088	8.8	223.52	44
0090	9.0	228.60	45
0092	9.2	233.68	46
0094	9.4	238.76	47
0096	9.6	243.84	48
0098	9.8	248.92	49
0100	10.0	254.00	50
0102	10.2	259.08	51
0104	10.4	264.16	52
0106	10.6	269.24	53
0108	10.8	274.32	54
0110	11.0	279.40	55
0112	11.2	284.48	56
0114	11.4	289.56	57
0116	11.6	294.64	58
0118	11.8	299.72	59

PITCH LENGTH CODE	Pitch Length		No. of Teeth
	Inch	mm	
0120	12.0	304.80	60
0122	12.2	309.88	61
0124	12.4	314.96	62
0126	12.6	320.04	63
0128	12.8	325.12	64
0130	13.0	330.20	65
0132	13.2	335.28	66
0134	13.4	340.36	67
0136	13.6	345.44	68
0140	14.0	355.60	70
0142	14.2	360.68	71
0144	14.4	365.76	72
0146	14.6	370.84	73
0148	14.8	375.92	74
0150	15.0	381.00	75
0152	15.2	386.08	76
0154	15.4	391.16	77
0156	15.6	396.24	78
0160	16.0	406.40	80
0162	16.2	411.48	81
0164	16.4	416.56	82
0166	16.6	421.64	83
0170	17.0	431.80	85
0172	17.2	436.88	86

PITCH LENGTH CODE	Pitch Length		No. of Teeth
	Inch	mm	
0176	17.6	447.04	88
0180	18.0	457.20	90
0182	18.2	462.28	91
0184	18.4	467.36	92
0188	18.8	477.52	94
0190	19.0	482.60	95
0194	19.4	492.76	97
0196	19.6	497.84	98
0198	19.8	502.92	99
0200	20.0	508.00	100
0202	20.2	513.08	101
0206	20.6	523.24	103
0208	20.8	528.32	104
0210	21.0	533.40	105
0212	21.2	538.48	106
0214	21.4	543.56	107
0220	22.0	558.80	110
0228	22.8	579.12	114
0230	23.0	584.20	115
0234	23.4	594.36	117
0236	23.6	599.44	118
0240	24.0	609.60	120
0248	24.8	629.92	124
0250	25.0	635.00	125

*Special Widths - cut to size from sleeves available from stock.

Continued on the next page






XL Timing Belts



Pitch .200" (5.08 mm)

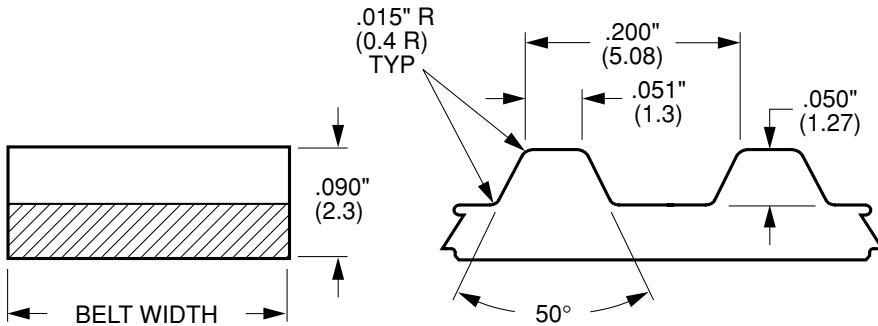


MATERIAL:
Nylon Covered, Fiberglass Reinforced, Neoprene

LOADING CAPACITY:
343 lbf/in. (60 N/mm) Belt Width

BREAKING STRENGTH:
≥457 lbf/in. (80 N/mm) Belt Width

TEMPERATURE RANGE:
-40°F to 248°F (-40°C to 120°C)

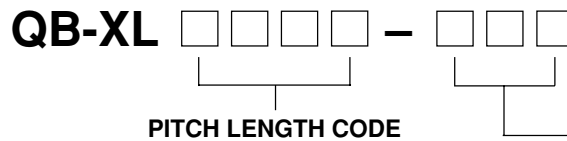

WIDTH CODE	Belt* Width
025	1/4" (6.4)
031	5/16" (7.9)
037	3/8" (9.5)

PITCH LENGTH CODE	Pitch Length		No. of Teeth
	Inch	mm	
0256	25.6	650.24	128
0260	26.0	660.40	130
0270	27.0	685.80	135
0276	27.6	701.04	138
0280	28.0	711.20	140
0282	28.2	716.28	141
0286	28.6	726.44	143
0290	29.0	736.60	145
0300	30.0	762.00	150
0304	30.4	772.16	152
0310	31.0	787.40	155
0316	31.6	802.64	158
0320	32.0	812.80	160
0326	32.6	828.04	163
0330	33.0	838.20	165
0340	34.0	863.60	170

PITCH LENGTH CODE	Pitch Length		No. of Teeth
	Inch	mm	
0344	34.4	873.76	172
0348	34.8	883.92	174
0352	35.2	894.08	176
0360	36.0	914.40	180
0364	36.4	924.56	182
0372	37.2	944.88	186
0376	37.6	955.04	188
0380	38.0	965.20	190
0384	38.4	975.36	192
0390	39.0	990.60	195
0400	40.0	1016.00	200
0412	41.2	1046.48	206
0414	41.4	1051.56	207
0424	42.4	1076.96	212
0430	43.0	1092.20	215
0432	43.2	1097.28	216

PITCH LENGTH CODE	Pitch Length		No. of Teeth
	Inch	mm	
0450	45.0	1143.00	225
0460	46.0	1168.40	230
0490	49.0	1244.60	245
0564	56.4	1432.56	282
0580	58.0	1473.20	290
0612	61.2	1554.48	306
0630	63.0	1600.20	315
0670	67.0	1701.80	335
0710	71.0	1803.40	355
0720	72.0	1828.80	360
0788	78.8	2001.52	394
0860	86.0	2184.40	430
1032	103.2	2621.28	516
1300	130.0	3302.00	650
1494	149.4	3794.76	747
2128	212.8	5405.12	1064

*Special Widths - cut to size from sleeves available from stock.

