




T2.5 Timing Belts



Pitch 2.5 mm (.098")

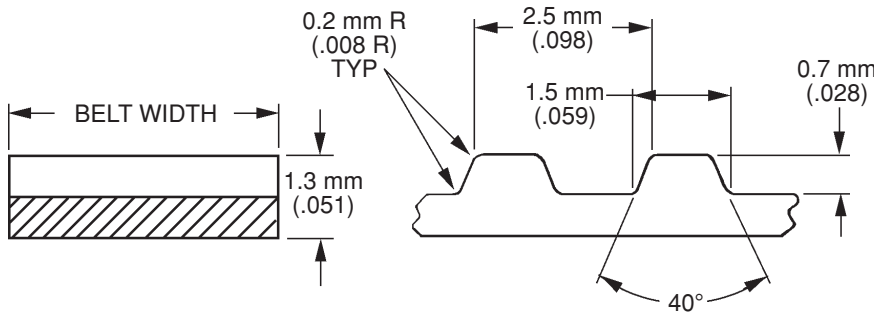


MATERIAL:
Nylon Covered, Fiberglass Reinforced, Neoprene

LOADING CAPACITY:
36 N/mm (205.6 lbf/in.) Belt Width

BREAKING STRENGTH:
≥46 N/mm (262.7 lbf/in.) Belt Width

TEMPERATURE RANGE:
-40°C to 120°C (-40°F to 248°F)

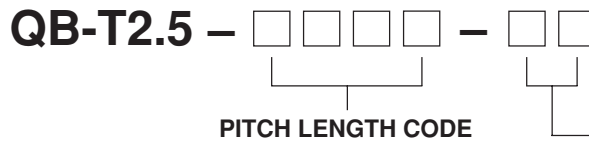

WIDTH CODE	Belt* Width
04	4 mm (.157)
06	6 mm (.236)
10	10 mm (.394)

PITCH LENGTH CODE	Pitch Length		No. of Teeth
	mm	Inch	
0103	102.5	4.035	41
0120	120	4.724	48
0145	145	5.709	58
0150	150	5.906	60
0160	160	6.299	64
0165	165	6.496	66
0178	177.5	6.988	71
0188	187.5	7.382	75
0200	200	7.874	80
0230	230	9.055	92
0245	245	9.646	98
0265	265	10.433	106
0285	285	11.220	114
0300	300	11.811	120
0318	317.5	12.500	127
0330	330	12.992	132
0335	335	13.189	134
0380	380	14.961	152

PITCH LENGTH CODE	Pitch Length		No. of Teeth
	mm	Inch	
0410	410	16.142	164
0420	420	16.535	168
0470	470	18.504	188
0480	480	18.898	192
0500	500	19.685	200
0540	540	21.260	216
0620	620	24.409	248
0635	635	25.000	254
0690	690	27.165	276
0705	705	27.756	282
0788	787.5	31.004	315
0975	975	38.386	390
1090	1090	42.913	436
1095	1095	43.110	438
1128	1127.5	44.390	451
1295	1295	50.984	518
1345	1345	52.953	538

*Special Widths - cut to size from sleeves available from stock.

