




Quality  
Transmission  
Components

# AT5 Timing Belts



Pitch 5 mm (.197")

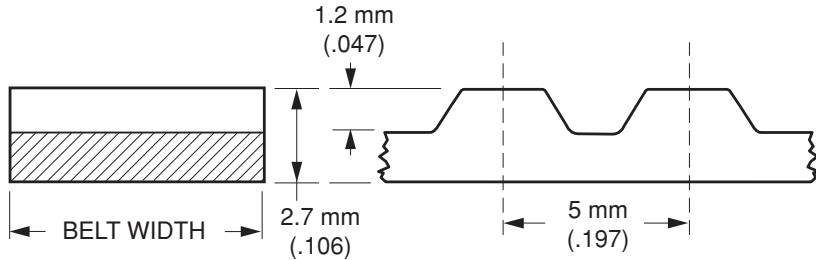

**MATERIAL:**

Nylon Covered, Fiberglass Reinforced, Neoprene

**LOADING CAPACITY:**

60 N/mm (343 lbf/in.) Belt Width

**BREAKING STRENGTH:**

≥80 N/mm (457 lbf/in.) Belt Width

**TEMPERATURE RANGE:**

-40°C to 120°C (-40°F to 248°F)

**QB-AT5** – □ □ □ □ – □ □

PITCH LENGTH CODE

WIDTH CODE	Belt* Width
06	6 mm (.236)
10	10 mm (.394)
16	16 mm (.630)
25	25 mm (.984)

PITCH LENGTH CODE	Pitch Length		No. of Teeth
	mm	Inch	
0300	300	11.811	60
0340	340	13.386	68
0390	390	15.354	78
0420	420	16.535	84
0455	455	17.913	91
0545	545	21.457	109
0600	600	23.622	120
0630	630	24.803	126
0660	660	25.984	132
0750	750	29.528	150
0975	975	38.386	195
1125	1125	44.291	225

\*Special Widths - cut to size from sleeves available from stock.

www.econobelt.com



Quality Transmission Components

125 Railroad Avenue, Garden City Park, NY 11040-5016

Phone: (516) 437-6700 • Fax: (516) 328-3343

e-mail: support@econobelt.com