




Quality
Transmission
Components

AT10 Timing Belts



Pitch 10 mm (.394")

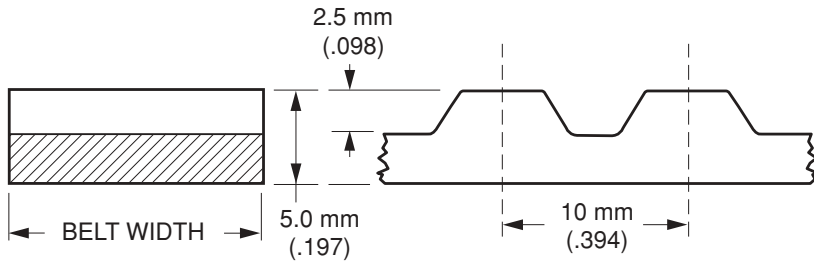

MATERIAL:

Nylon Covered, Fiberglass Reinforced, Neoprene

LOADING CAPACITY:

220 N/mm (1256 lbf/in.) Belt Width

BREAKING STRENGTH:

≥270 N/mm (1542 lbf/in.) Belt Width

TEMPERATURE RANGE:

-40°C to 120°C (-40°F to 248°F)

QB-AT10 – □ □ □ □ – □ □

PITCH LENGTH CODE

WIDTH CODE	Belt* Width
16	16 mm (.630)
25	25 mm (.984)
32	32 mm (1.260)

PITCH LENGTH CODE	Pitch Length		No. of Teeth
	mm	Inch	
0500	500	19.685	50
0560	560	22.047	56
0660	660	25.984	66
0730	730	28.741	73
0840	840	33.071	84
0920	920	36.220	92
0960	960	37.795	96
1010	1010	39.764	101
1150	1150	45.276	115
1210	1210	47.638	121
1240	1240	48.819	124
1250	1250	49.213	125
1280	1280	50.394	128

PITCH LENGTH CODE	Pitch Length		No. of Teeth
	mm	Inch	
1500	1500	59.055	150
1610	1610	63.386	161
1800	1800	70.866	180
1940	1940	76.378	194
2000	2000	78.740	200
2250	2250	88.583	225
2590	2590	101.969	259
2880	2880	113.386	288
3080	3080	121.260	308
3150	3150	124.016	315
3340	3340	131.496	334
4030	4030	158.661	403

*Special Widths - cut to size from sleeves available from stock.

www.econobelt.com



Quality Transmission Components

125 Railroad Avenue, Garden City Park, NY 11040-5016

Phone: (516) 437-6700 • Fax: (516) 328-3343

e-mail: support@econobelt.com